

KCU-01/KCU-02/KCU-03

USB / RS-485 / Ethernet Communication Modules

Specifications


Power Input	5 VDC
Power Consumption	< 1.0 watt
Operation Temperature	-20~70 °C
Relative Humidity	Maximum 95%
Weight	KCU-01 : 27.6 g ±2% KCU-02 : 27.8 g ±2% KCU-03 : 31.0 g ±2%



Features & Mechanical Specifications (Unit : mm)


KCU-01 : USB Module

- Friendly software Interface, for configuration and monitoring
- Support USB Modem for remote communication
- Support mini USB/5P B-type cable
- Equipped with LED status indicator

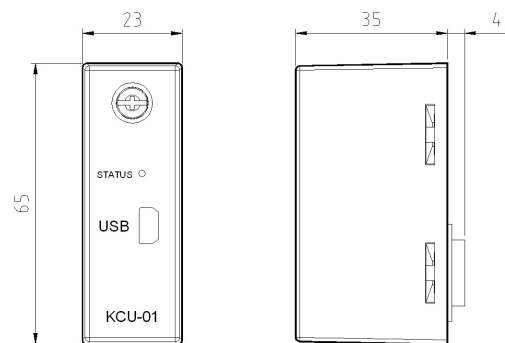

KCU-02 : RS-485 Module

- Friendly software Interface, for configuration and monitoring
- Working under Half-Duplex mode
- Automatic configuration of RS485 Address and Baud Rate
- Equipped with LED status indicator

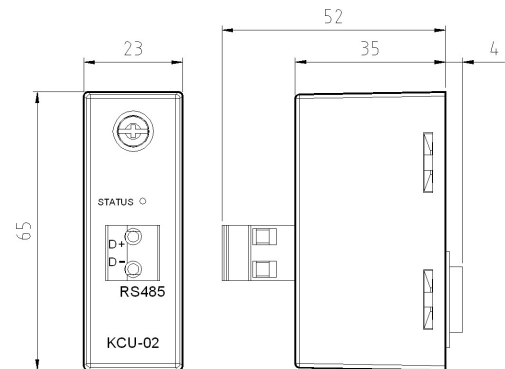

KCU-03 : Ethernet Module

- Friendly software Interface, for configuration and monitoring
- All transfer data with encrypted and decrypted protection
- System automatically disconnect after 3 failure registry logins
- System automatically disconnect if data packet is not correctly received within 5 second after registry login
- Server Device, supports maximum of 4 users to simultaneously login
- Security password to enable controller system parameter configuration
- Equipped with LED status indicator
- Support 10-Base-T network transmission

